

HPM-9050 9-inch HDTV Monochrome Monitor

Specifications

GENERALS

Power	AC100V~240V 50/60Hz, approx. 60W or less
Ambient Temperature	0°C ~ +40°C (32°F ~ 104°F) 90% or less relative humidity
External Dimensions (W x H x D)	220 x 215 x 255mm (8.66 x 8.46 x 10.04 inches)
Weight	Approx. 7.5 kg (16.53 lbs)
Connector	Video input: BNC type (2 systems) Sync input: BNC type (1 system) Remote input Tally input
Front Panel Controls	Power ON/OFF, Video input A/B, Sync input EXT/INT, Size NOR/WIDE, 16:9/4:3, Contrast, Brightness
Remote Operation	Video input A/B, Sync input EXT/INT, 4:3/16:9, RED, GREEN tally ON/OFF,
Safety Standard	UL, FCC, DHHS
Standard Accessories	Remote Connector, AC Cable, Operation Manual
RATING	
Input Signal	Analog 1080i(Y)/60, 59.94Hz 1035i(Y)/60, 59.94Hz
Input Level	Video Signal: VS 1.0Vp-p or V 0.7Vp-p, positive Sync Signal: 0.3Vp-p
Input Impedance	Video input/Video sync: 75Ω terminated or high impedance bridge connection
Output Level	25Vp-p
CRT	E8069B4
Phosphor Colorimetry	6500°K
Operation	Continuous
Scanning Size	Normal Scan: W160 x H90 mm <16:9 mode> Wide Scan: Area of 16:9 aspect ratio where the picture with touch to the right and left of the escutcheon.

<4 : 3 mode>

Wide Scan: Area of 4:3 aspect ratio where the picture height in 16:9 touch to the top and bottom of the escutcheon.

PERFORMANCE

Horizontal Resolution	800TV Lines or more at center
Power Voltage Fluctuation	Will maintain stable picture quality with a ± 10% AC input voltage fluctuation.
X-ray Radiation	Less than 0.1mR/H under normal operation at the place 50mm away from the monitor. (Should not be over 0.5mR/H even when damaged.)

VIDEO Signal System

Frequency Response	50Hz ~ 30MHz: within +1/-3dB Over 30MHz: Falling From video input terminal to CRT drive output referred to 100KHz under the rated output. Approx. 33dB or more Continuously variable from 0 ~ max. gain
Max Gain	
Gain (contrast) Adjustment	

DEFLECTION SYSTEM


Sync Stability	Stability of synchronization will be met for the following conditions. VS Level Change ± 6dB
Internal Sync	0.3V ~ 6Vp-p
External Sync	
Scanning Amplitude	Must be adjusted to the rated size of 4:3 or 16:9 aspect ratio.

Deflection Distortion Less than 1% both for deflection linearity and raster distortion.
0.2mm or less


HIGH VOLTAGE

Hum Oscillation	
Tolerance Regulation	Approx. 12KV ± 1KV (cut off) Less than ± 3% over the range of 0 to 200μA Referred to 100μA.

DUAL UNITS

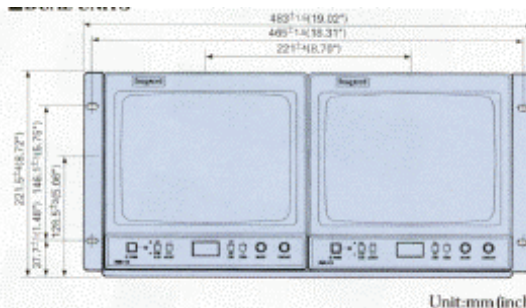

Dimensions

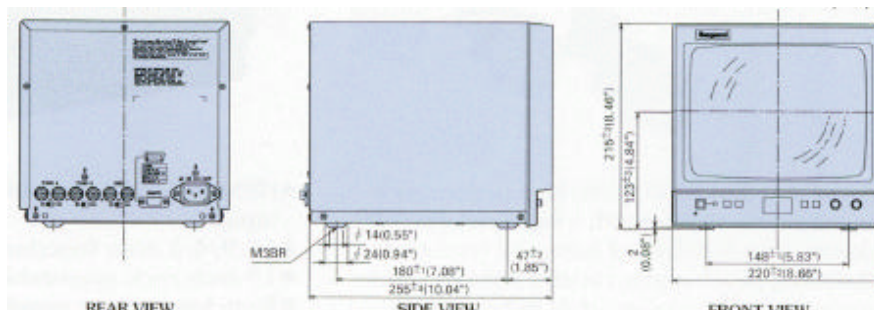

Design and specifications are subject to change without notice.

Ikegami IKEGAMI ELECTRONICS (U. S. A.), Inc.

URL <http://www.ikegami.com>

HEADQUARTERS	37 Brook Ave., Maywood, NJ 07607 Phone (201)368-9171 Fax (201)569-1626
WESTCOAST	2631 Manhattan Beach Blvd., Redondo Beach, CA 90278 Phone: (310)297-1900 Fax (310)536-9550
SOUTHWEST	526 Bluebird Lane, Red Oak, TX 75154 Phone: (972)869-2363 Fax: (972)556-1057
MIDWEST	747 Church Rd., Unit C1, Elmhurst, IL 60126 Phone (630)834-9774 Fax (630)834-8689
SOUTHEAST	5200 NW 33 rd Ave., Suite 111, Fort Lauderdale, FL 33309 Phone (954)735-2203 Fax (954)735-2227