




OPERATING INSTRUCTIONS & SERVICE MANUAL

Model **PM-175A** CCTV PICTURE MONITOR

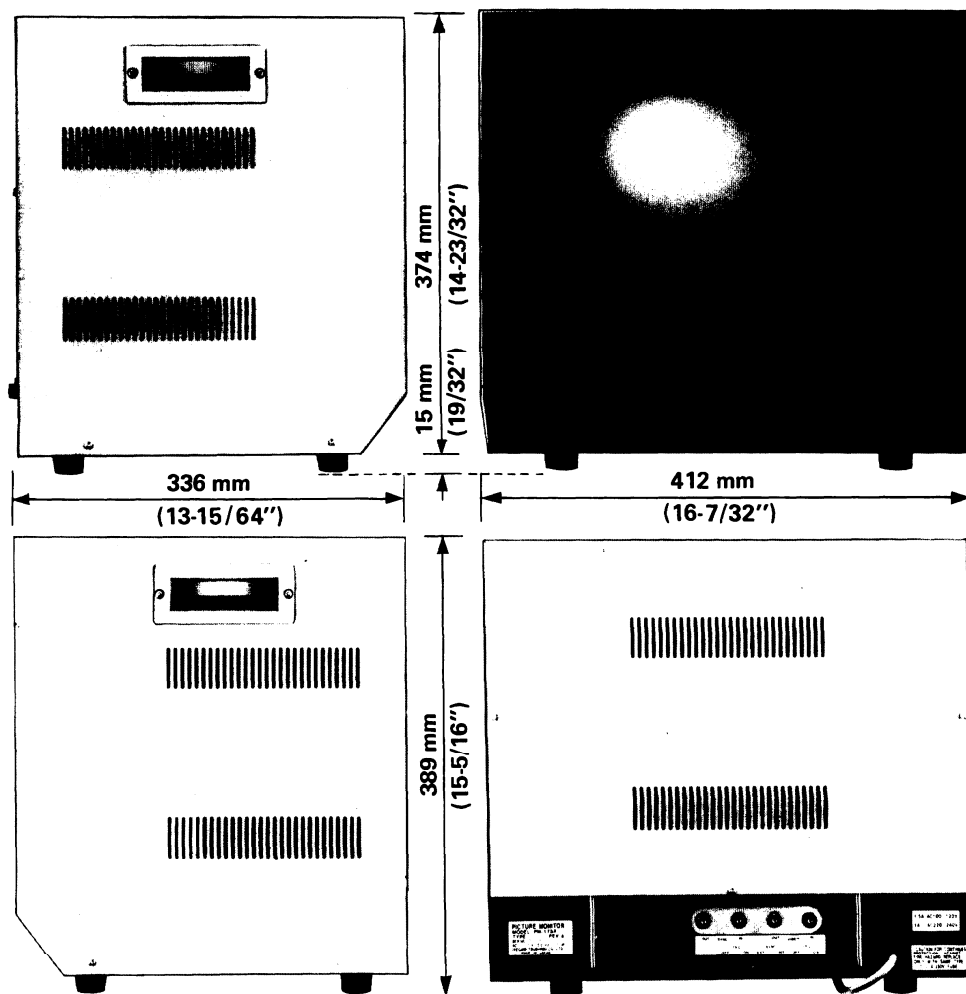

OUTDOOR USE WARNING:

WARNING — TO PREVENT FIRE OR ELECTRIC SHOCK,
DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

CONTENTS

IMPORTANT SAFEGUARDS	1
INTRODUCTION	3
FEATURES	4
RATINGS	5
CONSTRUCTION	6
PERFORMANCE	6
HANDLING PRECAUTIONS	8
SETUP AND OPERATION	9
NAME OF EACH SECTION	14
SERVICE AND MAINTENANCE	16
CAUTIONS	17
INTERNAL ADJUSTMENTS LOCATION	18
MAIN COMPONENTS LOCATION	19
PARTS LIST	20
EXPLODED VIEW	23
SCHEMATIC DIAGRAM	24
PARTS LOCATION DIAGRAM	25
EXTERNAL APPEARANCE	26



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

IMPORTANT SAFEGUARDS

- * Read all of these instructions.
- * Save these instructions for later use.
- * Unplug this television monitor from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use a damp cloth for cleaning.
- * Do not use attachments not recommended as they may cause hazards.
- * Do not use this television monitor near water—for example, near a bathtub, washbowl, kitchen sink, or laundry tub, in a wet basement, or near a swimming pool, etc.
- * Do not place this television monitor on an unstable cart, stand, or table. The television monitor may fall, causing serious injury to a child or adult, and serious damage to the appliance. Use only with a cart or stand recommended, or sold with the television monitor. Wall or shelf mounting should follow the manufacturer's instructions, and should use a mounting kit approved.
- * Slots and openings in the cabinet and the back or bottom are provided for ventilation, and to ensure reliable operation of the television monitor and to protect it from overheating, these openings must not be blocked or covered. The openings should never be blocked by placing the television monitor on a bed, sofa, rug, or other similar surface. This television monitor should never be placed near or over a radiator or heat register. This television monitor should not be placed in a built-in installation such as a bookcase unless proper ventilation is provided.
- * This television monitor should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supplied to your home, consult your television dealer or local power company. For television monitor designed to operate from battery power, refer to this operating instructions.
- * This television monitor is equipped with a polarized alternating-current line plug (a plug having one blade wider than the other). This plug will fit into the power outlet only one way. This is a safety feature. If you are unable to insert the plug fully into the outlet, try reversing the plug. If the plug should still fail to fit, contact your electrician to replace your obsolete outlet. Do not defeat the safety purpose of the polarized plug.

- * Do not allow anything to rest on the power cord. Do not locate this television monitor where the cord will be abused by persons walking on it.
- * Follow all warnings and instructions marked on the television monitor.
- * For added protection for this television monitor during a lightning storm, or when it is left unattended and unused for long periods of time, unplug it from the wall outlet. This will prevent damages to the receiver due to lighting and powerline surges.
- * Do not overload wall outlets and extension cords as this can result in fire or electric shock.
- * Never push objects of any kind into this television monitor through cabinet slots as they may touch dangerous voltage points or short out parts that could result in a fire or electric shock. Never spill liquid of any kind on the television monitor.
- * Do not attempt to service this television monitor yourself as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service personnel.
- * Unplug this television monitor from the wall outlet and refer servicing to qualified service personnel under the following conditions.
 - a. When the power cord or plug is damaged or frayed.
 - b. If liquid has been spilled into the television monitor.
 - c. If the television monitor has been exposed to rain or water.
 - d. If the television monitor does not operate normally by the following operating instructions. Adjust only those controls that are covered by the operating instructions as improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the television monitor to normal operation.
 - e. If the television monitor has been dropped or the cabinet has been damaged.
 - f. When the television receivers exhibits a distinct change in performance-this indicates a need for service.
- * When replacement parts are required, be sure the service technician has used replacement parts specified by the manufacturer that have the same characteristics as the original part. Unauthorized substitutions may result in fire, electric shock, or other hazards.
- * Upon completion of any service or repairs to this television monitor, ask the service technician to perform routine safety check to determine that the television is in safe operating condition.

INTRODUCTION

Model PM-175A 17-inch Picture Monitor incorporates a number of the latest technologies for picture monitoring. Except for the CRT, the entire circuits are packaged in IC's, or are all silicon semiconductor devices. The Model is of rugged construction to resist vibration and shock, and is a highly reliable performance monitor.

To facilitate handling and operation, all circuits of this monitor are mounted on one main printed-circuit board, which is easily dismounted or remounted.

The frame and signal grounds are separately provided.

In terms of the electrical performance, aiming at reproducing high-quality pictures, a wide band video amplification circuit for $15\text{ MHz}^{+1}_{-6}\text{ dB}$ or less assures a horizontal center resolution of better than 800 lines. It features excellent performance of linearity restricting deflection distortion and raster distortion.

For ease of operation, the front control panel has only two control knobs - one for brightness and the other for contrast. H and V synchronous control is adjusted by the driver so that they are not changed by any error.

Additionally, front control panel is equipped with the power supply switch, LED lamps, and tally lamp panel (optional provision). The black front panel suppresses undesired reflection and glare, and the outward appearance is in keeping with the high performance picture monitor model PM-175A.

As standard, internal-external switchable synchronization and DC restoration are provided.

Optional provisions are: a tally function; audio unit; and standard rackmount panel.

Full precautionary measures have been incorporated to satisfy DHHS standards regarding X-ray radiation from the CRT.

As described, although the monitor is well designed and constructed regarding safety, there is high voltage in certain sections. Always turn off the power supply, or be very careful if the power cannot be turned off, when inside of the equipment is accessed for servicing or repair.

FEATURES

- (1) The highly reliable design, with abundant use of IC's and silicon transistors, promises to reduce failures to the minimum. The stable circuits always assure high-quality pictures without requiring adjustment for power supply voltage or temperature variations.
- (2) An external synchronizing signal input terminal on the unit permits operation of the unit not only by the video composite synchronizing signal (VS), but also by different type video signals and by synchronizing signal (SYNC).
- (3) A BP clamp is used in the DC restoration circuit, and no change in black level results from any difference in synchronizing signal level, thus resulting in high-quality pictures.
- (4) The CRT is a 17-inch thick-neck 114° deflection type for clearer pictures.
- (5) The system provides for use of several monitors connected in parallel.
- (6) The equipment body has a rugged metal cabinet providing ample strength and safety.
- (7) The equipment is of the floating earth system to provide high safety against electric shock.
- (8) The design is similar to those used for CRT display monitors employed in computer systems ensuring pictures of high reliability and quality.
- (9) High picture quality is further enhanced by the wider frequency response of the video AMP and superior linearity of the deflection system, and by other features.
- (10) Safety standard, such as CRT X-ray radiation, has fully been considered to meet the safety requirements of the equipment.
- (11) The built-in video limit circuit suppresses white level during peak time and prevents an excessive cathode current.
- (12) The ABL circuit limits CRT cathode current even when a video signal of increased brightness is supplied.
- (13) The built-in picture size stabilization circuit suppresses picture size drift to the minimum during brightness changes.

RATINGS

Input Level

Video: VS 1.0 V_{p-p} or V 0.7 V_{p-p} (positive)
Synchronizing: 4 V_{p-p} (negative)

Input Impedance

Video: High-impedance bridge connection and 75 Ω termination
Synchronizing: High-impedance bridge connection and 75 Ω termination

Video Output Level: 40 V_{p-p}

CRT

Model: 440LB4, or equivalent
Screen Size: 17" (diagonal)
Neck Diameter: 28.6 ϕ
Explosion protection: Tension band with mounting lugs
Phosphor: P4
Effective Display Area: 269.9 x 346.1 mm, or larger
Light Transmission: 44% approx. (at center)
Scanning Frequency: Horizontal 15.75 kHz vertical 60 Hz, or
Horizontal 15.625 kHz vertical 50 Hz
(according to specification)
Power Requirement: 100 V AC 50/60 Hz, 120 V AC 60 Hz,
220 V AC 50 Hz, 240 V AC 50 Hz
(according to specification)
Connectors: BNC type
Power Consumption: Less than 65 W
Environmental Temperature: -10° to +45°C

CONSTRUCTION

External Dimensions:	412 (W) x 389 (H) x 336 (D) mm
Weight:	Approx. 15.5 kg (Standard Type)

PERFORMANCE

General Performance

Resolution:	More than 800 lines horizontal (at center)
Brightness:	More than 30FL continuously variable against rated input white signal
Power Supply Voltage: Variation	Satisfactory operation shall be assured even when the input voltage varies $\pm 10\%$ of rated value during operation.
Spot Killer:	Prevents spot burn-in of CRT with loss of power
Isolation:	More than 50 M Ω when measured by 500 V Megger between the AC input terminal and cabinet.
Voltage Withstanding:	There shall be no abnormality after impressing AC 1500 V for one minute between the AC input plug and cabinet.
Vibration:	No parts shall loosen by dropping, or damaging after vibrating the equipment in an operating state at 1000 cps (16.7 Hz) at an acceleration of 2 G for 30 minutes vertically and horizontally.

Picture Amplification Circuit

Maximum Gain:	44 dB ± 2 dB
Frequency Characteristic:	Refer to 100 kHz. 60 Hz to 15 MHz Within $\begin{matrix} +1 \\ -6 \end{matrix}$ dB Below 60 Hz over 15 MHz: falling down characteristic
Waveform Distortion:	Sag: Less than 5% (against 60 Hz square wave) Overshoot: Under 10% (against 250 kHz square wave) Ringing greater than 15 MHz shall be excluded.
Linearity:	$\pm 5\%$ or below (by DG method)
Signal to Noise:	Refer to input signal. Output signal is as follows. Hum noise: Less than -60 dB Synchronous noise: Less than -40 dB
DC Restoration:	Fluctuations of DC components at APL 10 to 90% shall be less than 3% of rated output.

Deflection Circuit

Synchronous Stability: Stable within input signal range of:
Internal Synchronizing
VS 0.5 to 2.0V_{p-p}
External Synchronizing
S 2.0 to 6.0 V_{p-p}

Raster Distortion: Less than 2% on effective screen
amplitude

Deflection Distortion: By the interval variation index
method:
Horizontal Below 7%
Vertical Below 5%

Blanking Time: Horizontal Approx. 11.5 μ s
Vertical Less than 1 ms

Deflection Amplitude: 5% and over

Power Supply Circuit

High Voltage: Approx. 16 kV

Others

X-Ray Radiation: Less than 0.5 mR/HR

Ground: Frame ground and video ground shall
connect at 0.0047 μ F and 1 M Ω .

* Design and specifications are subject to change for improvement
without notice.

HANDLING PRECAUTIONS

- (1) This equipment can be installed in any position. Monitoring of good pictures will be possible by paying attention to the following:
 - (a) There should be no nearby source to cause vibration.
 - (b) The surface of the CRT is free from direct sunshine and light.
 - (c) When using adjacent to other equipment, ensure good ventilation by keeping a space greater than 50 mm in all directions between the monitor and other equipment.
 - (d) Avoid moisture as much as possible.
 - (e) Avoid dusty locations.
 - (f) There is no equipment nearby generating a strong magnetic field.
 - (g) Extremes of hot and cold temperature should be avoided.
- (2) The picture disappears when the contrast (CONT) and brightness (BRIGHT) controllers are rotated fully counterclockwise. However, this is not a unit failure.
- (3) The equipment comes suitable to both 50 and 60 Hz in supply frequency. Vertical amplitude changes when a combination with different frequencies is used.
- (4) A high voltage, 16 kV, is generated inside the equipment, and persons except servicing staff should not open the case.
- (5) Regularly check the connection cables, which are prone to damage, especially in outdoor use. The cable should always be handled with care, kept free from sharp bends and kinks, and relieved from strain near the connectors. Checking of the connectors for full insertion and tightness is also recommended, especially where the same set up is used for a long time.

SETUP AND OPERATION

(1) Power Supply

Connect the power supply (single phase, AC within 10% of the specified voltage) to the AC plug. A picture appears on the screen within 30 seconds after turning on the power supply switch.

(2) Video and Synchronizing Signals

A. Connections between one monitor unit and one camera unit

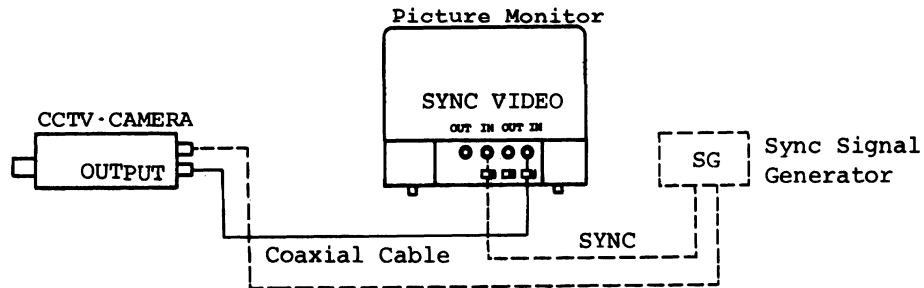


Fig. 1 Connections Between Monitor Unit and Camera

- * Connect the camera OUTPUT BNC connector and VIDEO IN BNC connector by a 75- Ω coaxial cable.
- * Set the monitor VIDEO 75 Ω -OFF at 75 Ω .
- * Set SYNC INT-EXT at INT.
- * Set the monitor SYNC INT-EXT at EXT and SYNC 75 Ω -OFF at 75 Ω when using the monitor in the external synchronization mode. Connect SYNC OUT on the synchronizing signal generator and BNC connector at SYNC IN on the monitor to the 75 Ω coaxial cable.
- * There are two input connectors each for VIDEO and SYNC. Be sure to connect to the IN side when supplying signals.

B. Connections between one monitor unit and several cameras

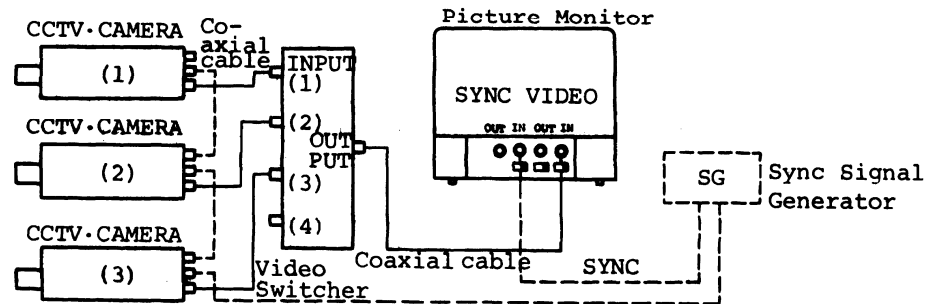


Fig. 2 Connections Between Monitor and Several Cameras

- * When monitoring pictures from several cameras on one monitor by sequentially switching them, a video switcher shall be used.
- * Connect the BNC connector at camera OUTPUT and BNC connector at INPUT on the video switcher by a 75-Ω coaxial cable.
- * Connect the BNC connector at OUTPUT on the video switcher and BNC connector at VIDEO IN on the monitor by a 75-Ω coaxial cable.
- * Set monitor VIDEO 75Ω-OFF at 75Ω.
- * Set monitor SYNC INT-EXT at INT.
- * When using the monitor in the external synchronization mode, set monitor SYNC INT-EXT at EXT and SYNC 75Ω-OFF at 75Ω. Connect SYNC OUT on the synchronizing signal generator and BNC connector at SYNC IN on the monitor by a 75-Ω coaxial cable.

C. Connection of several monitors and one camera

C1. Bridge connection of monitors

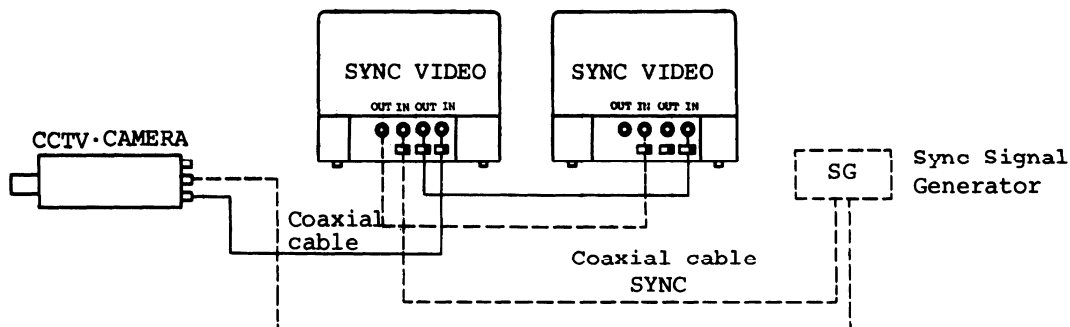


Fig. 3 One Camera and Bridge Connection of Several Monitors

- * Connect the BNC connector at OUTPUT of the camera and BNC connector at VIDEO IN on the monitor (1) by a 75- Ω coaxial cable.
- * Connect a 75 Ω -coaxial cable to VIDEO OUT on the monitor (1) and to VIDEO IN on the monitor (2).
- * Set VIDEO 75 Ω -OFF on the monitor (1) at OFF and that on the monitor (2) at 75 Ω .
- * When connecting more than two monitors, connect sequentially in series beginning with the first monitor, setting the last monitor at 75 Ω and setting all the other monitors at OFF.
- * Set SYNC INT-EXT on the monitor at INT.
- * When using the monitors in external synchronous mode, connect SYNC OUT on the synchronizing signal generator and SYNC IN on the monitor. Set SYNC 75 Ω -OFF on the last monitor at 75 Ω , setting all the other monitors at OFF.
- * When more than ten monitors are to be used for one camera, use a video distributor.
- * A synchronizing distributor is recommended to be used when SYNC is to be used by several monitors.

C2. Use of video distributor

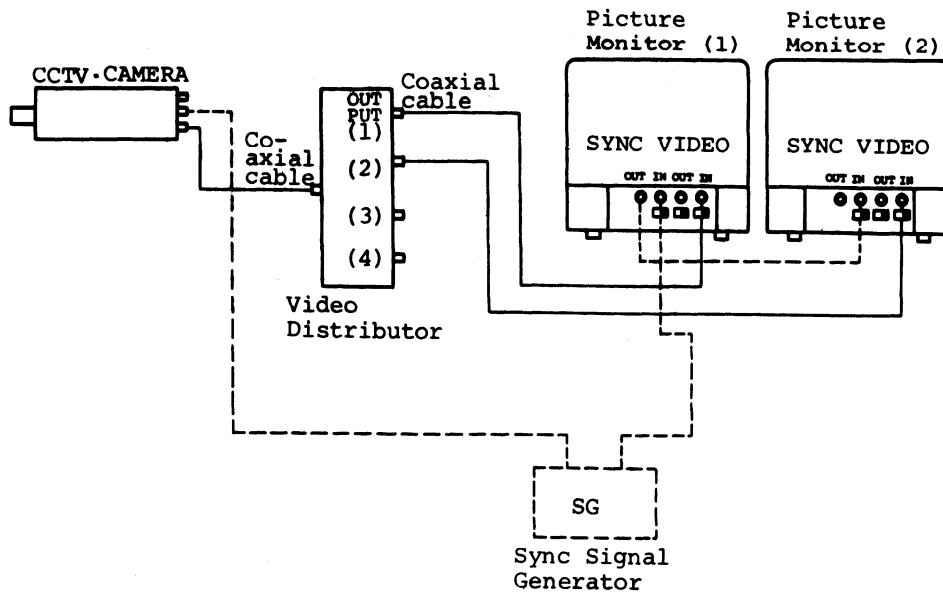


Fig. 4 Use of Video Distributor

- * When connecting a camera and several monitors, a video distributor is used in addition to the bridge connection described in C1.


In this method, the picture shown on the monitors near the end of the bridge connection does not degrade compared with that on monitors connected nearer the camera. The distributor corrects picture characteristics so that all are the same, and pictures of equal quality can be watched on all monitors.

- * Connect the BNC connector at OUTPUT on the camera and that at INPUT on the video distributor by a $75\text{-}\Omega$ coaxial cable.
- * Connect the BNC connector at OUTPUT on the video distributor and that at VIDEO IN on the monitor by a $75\text{-}\Omega$ coaxial cable.
- * Set VIDEO 75Ω -OFF on all monitors at 75Ω .
- * Set SYNC INT-EXT on monitors at INT.


- * When using the monitors in external synchronizing mode, connect SYNC INT-EXT on the monitors to SYNC OUT on the EXT synchronizing signal generator and BNC connector at SYNC IN on the monitors by a 75- Ω coaxial cable sequentially in series beginning with the first monitor. Set SYNC 75 Ω -OFF on the last monitor at 75 Ω , setting at OFF on all the remaining monitors.
- * A synchronizing distributor is recommended to be used when utilizing SYNC by several monitors.

NAME OF EACH SECTION

(1) Front Panel Operation

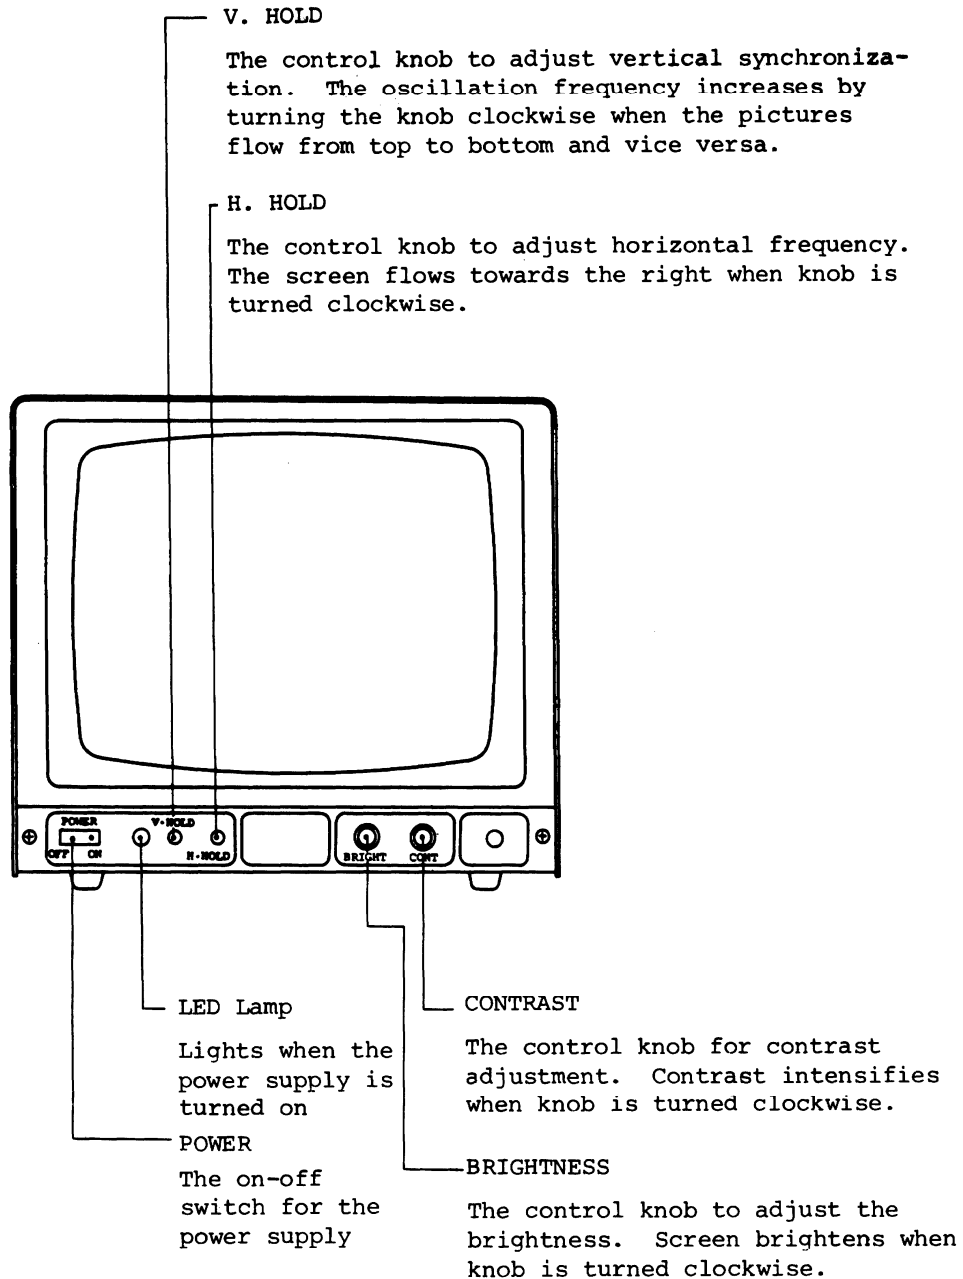

(2) Rear Panel Operation

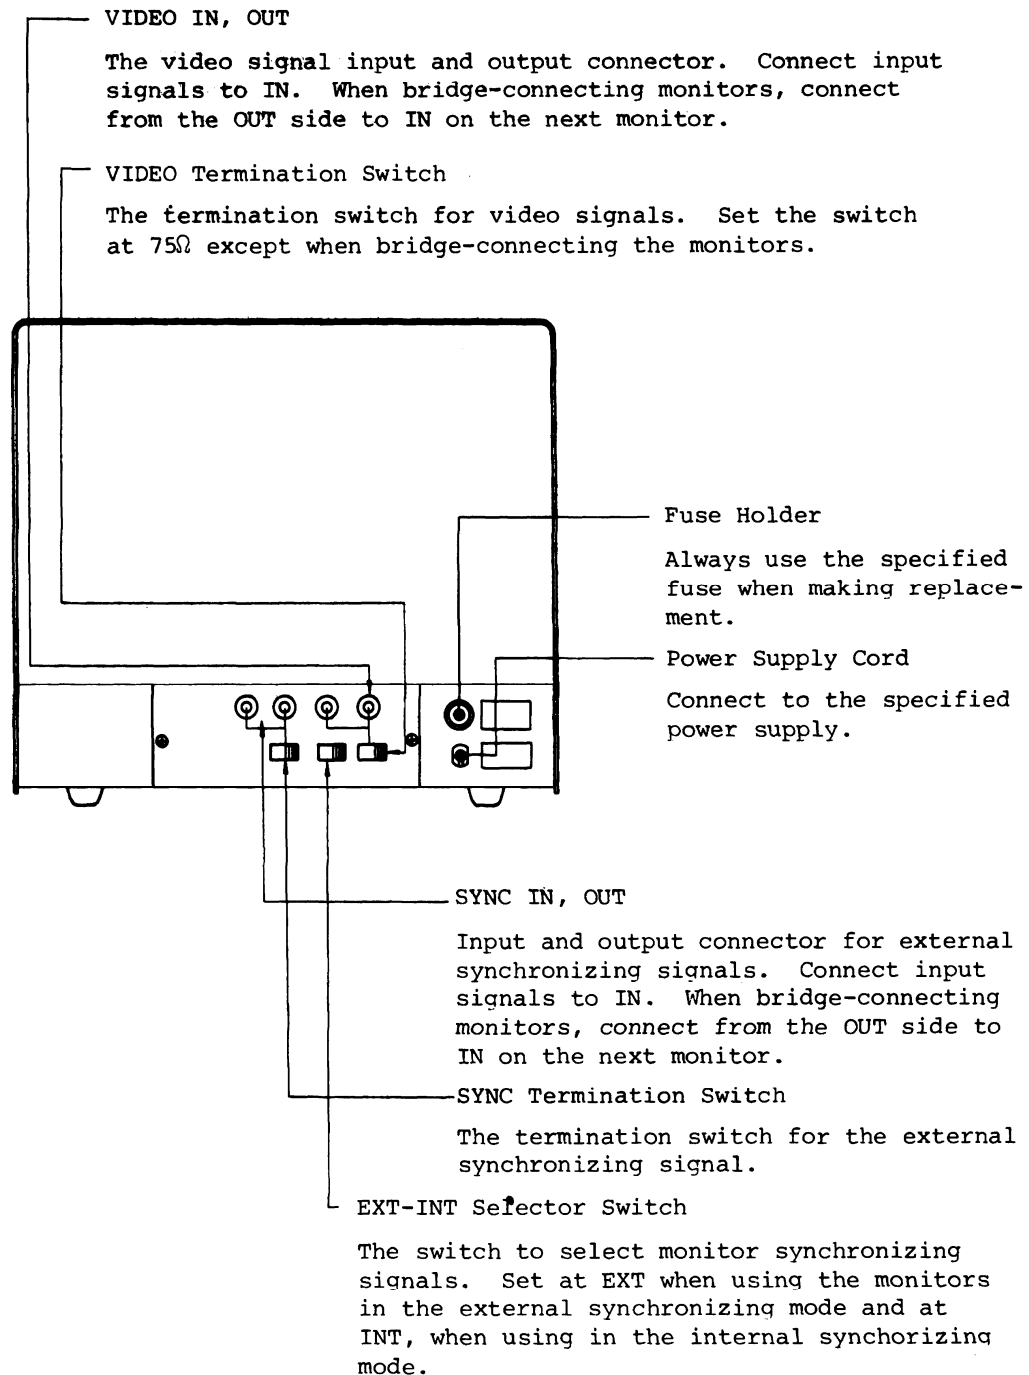

SERVICE AND MAINTENANCE

(1) Overall Description

The equipment has been designed to provide fully continuous operation. To assure satisfactory performance, attention should be given to the following items, and periodic inspection is necessary.

- (a) Check for knob positions and bad contacts.
- (b) Check for connector connections.
- (c) Check for short circuits in input and output circuits.
- (d) Be careful about any rise in internal temperature.
- (e) Check for soldering.
- (f) Clean inside the equipment.

(2) General Precautions

- (a) Do not disconnect or reconnect connectors while the power is switched on.
- (b) Dust on the monitor CRT anode will easily cause discharge. After cleaning, apply an insulating silicone oil.
- (c) In many instances, high voltage is present at the anode and anode cap. The monitor CRT should always be exchanged only after discharging it.

(3) Precautions When Handling Transistors

With the exception of the CRT, all active devices used in the equipment are transistors. Compared with conventional vacuum tubes, the following items require precautions:

- (a) Transistors, which are very strong against mechanical shock, are weak to electrical shock. Carefully inspect the circuits when an inspection has to be made with the equipment in operation. Do not cause short-circuiting by tips of test leads, etc.
- (b) Do not dismount or remount circuit components without switching the power off.
- (c) Do not connect a capacitor to a circuit in operation by error. (Large-capacitance capacitors require particular attention)


Connecting a large-capacitance capacitor which is not charged, not only transistors on that particular printed circuit board, but also in other circuits may be damaged.


- (d) Be careful not to transmit unnecessary heat when soldering transistors.
- (e) Under no circumstance should a soldering iron with an AC leak be used.
- (f) When using an oscilloscope to check waveforms, a high-impedance terminal should always be used.
- (g) When measuring various sections in a transistor circuit, it is preferred to use a vacuum tube voltmeter instead of a tester.
- (h) When there is a possibility a transistor may have been damaged by error, forward and inverse resistances between the collector and emitter should be measured by using a tester to obtain approximate details, or ICO shall be measured by a transistor checker.

CAUTIONS

- (1) The face of the picture tube is a part of a high vacuum. Score, scratch or applying undue pressure may result in implosion of the picture tube, and serious personal injury may be caused.
- (2) The components marked with ★ in parts list and schematic diagram are critical ones of X-ray radiation. Replacement of these critical components should be made by confirmation anode voltage 17 kV or less.
- (3) This monitor provides integral protection type picture tube against implosion and X-ray radiation. Use the same type picture tube in case of replacement.
- (4) In case that the following parts are replaced by new ones, make sure that the +B voltage is set within +110 V \pm 1 V.
 - IC101 Integrated circuit

INTERNAL ADJUSTMENTS LOCATION

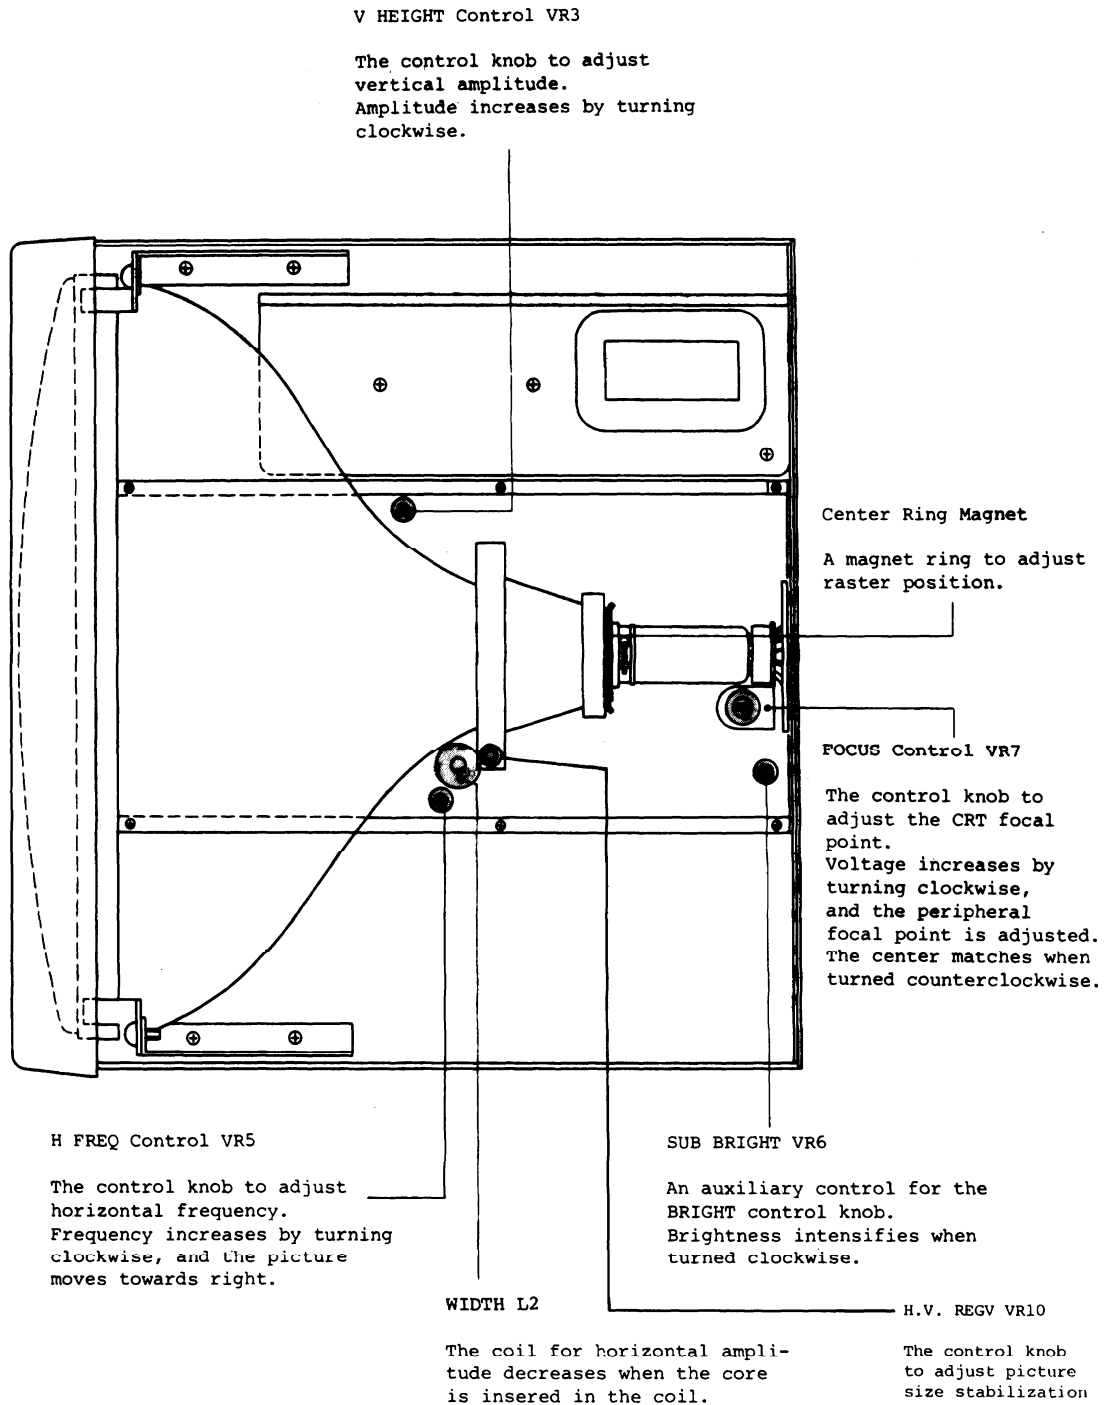

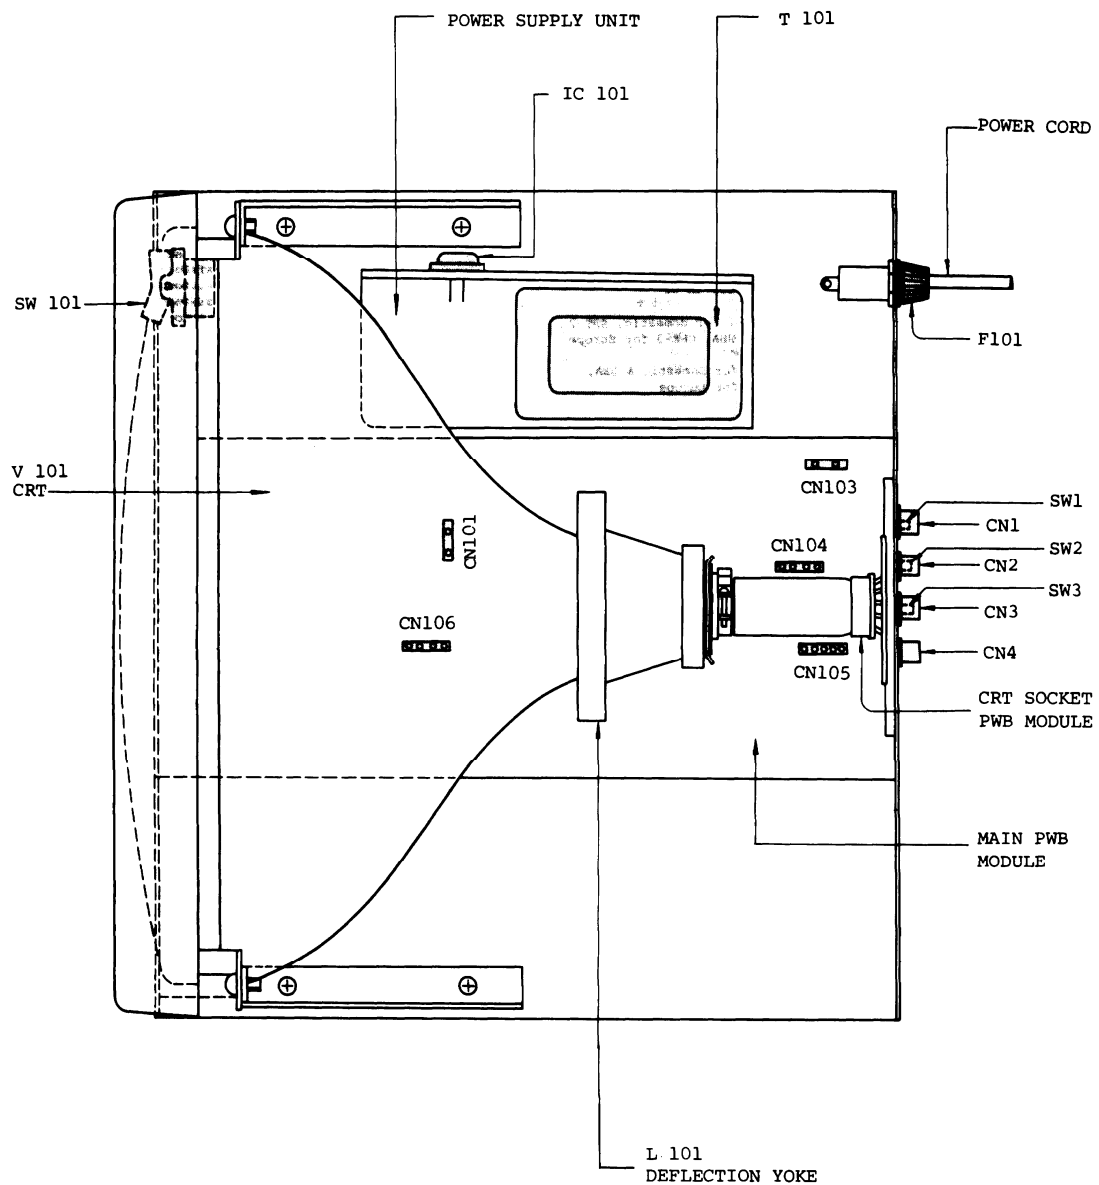

**MODEL PM-175A PICTURE MONITOR
MAIN PARTS LOCATION**


MAIN CHASSIS					
★△V101	CRT	440LB4 or equivalent	R12	Carbon film resistor	1/4W 15k ohms
★△L101	Deflection Yoke	ST4-B49008-1	R13	Carbon film resistor	1/4W 1k ohms
△SW01	Power Switch	SDA-1S for Domestic, SDE-3S for USA, SDE-3S-E for Europe	R14	Carbon film resistor	1/4W 6.8k ohms
		ST4-B87046	R15	Carbon film resistor	1/4W 22k ohms
★△T101	Transformer	STR370	R16	Carbon film resistor	1/4W 150 ohms
★△IC101	Integrated circuit	GL-MD31AR (red)	R17	Carbon film resistor	1/4W 5.6k ohms
D201	Diode luminescence	171822-2	R18	Not used	
CN101	Connector	170038-2	R19	Carbon film resistor	1/4W 470 ohms
	2P receptacle	WA-5002-1N-02	R20	Not used	
CN102	Connector	WA-5002-1N-02	R21	Metal oxide film resistor	2W 22k ohms
	1P receptacle	WA-5004-1N-02	R22	Carbon film resistor	1/4W 1.5k ohms
CN103	Connector	WA-5002-1N-02	WR23	Carbon film resistor	1/4W 15 ohms
	2P receptacle	WA-5004-1N-02	R24	Carbon film resistor	1/4W 47 ohms
CN104	Connector	WA-5004-1N-02	WR25	Carbon film resistor	1/4W 1k ohms
	4P receptacle	WA-5005-1N-02	R26	Carbon film resistor	1/4W 1.8k ohms
CN105	Connector	WA-5005-1N-02	R27	Cement film resistor	10W 2.2k ohms
CN106	Connector	WA-5004-1N-02	R28	Carbon film resistor	1/4W 10k ohms
	4P receptacle	WA-5001-1N-02	R29	Carbon film resistor	1/4W 820k ohms
CN107	Connector	WA-5001-1N-02	R30	Carbon film resistor	1/4W 75 ohms
	1P receptacle		R31	Carbon film resistor	1/4W 1k ohms
△PC101	Power cord	SPT-1 for domestic, SPT-2 for USA, CEE-3 for Europe	R32	Carbon film resistor	1/4W 10k ohms
F101	Fuse holder	EN1301	R33	Carbon film resistor	1/4W 15k ohms
△	Fuse	MGC 1.5A/250V for Domestic & USA, MGC 1.0A/250V for Europe	R34	Carbon film resistor	1/4W 10k ohms
			R35	Carbon film resistor	1/4W 39k ohms
MAIN PMB			R36	Carbon film resistor	1/4W 3.3k ohms
★ IC1	Integrated circuit	HA11235	R37	Carbon film resistor	1/4W 10k ohms
IC2	Integrated circuit	HD14011BP	R38	Carbon film resistor	1/4W 22k ohms
Q1	Transistor	2SC1815 (Y)	R39	Carbon film resistor	1/4W 68k ohms
Q2	Transistor	2SA1015 (Y)	R40	Carbon film resistor	1/4W 4.7k ohms
Q3	Transistor	2SC1815 (Y)	R41	Carbon film resistor	1/4W 3.9k ohms
Q4	Transistor	2SC1815 (Y)	R42	Carbon film resistor	1/4W 4.7k ohms
Q5	Transistor	2SC1815 (Y)	R43	Carbon film resistor	1/4W 3.3k ohms
Q6	Transistor	2SC1973 (NC)	R44	Carbon film resistor	1/4W 2.2k ohms
Q7	Transistor	2SC1505 (K)	R45	Carbon film resistor	1/4W 2.2k ohms
Q8	Transistor	2SD1138 (C or D)	R46	Carbon film resistor	1/4W 10k ohms
Q9	Transistor	2SD1138 (C or D)	R47	Carbon film resistor	1/4W 100k ohms
Q10	Transistor	2SC2899	R48	Carbon film resistor	1/4W 10k ohms
△Q11	Transistor	2SD9008	R49	Carbon film resistor	1/4W 22k ohms
★Q12	Transistor	2SC1815 (Y)	R50	Carbon film resistor	1/4W 12k ohms
★Q13	Transistor	2SC1815 (Y)	R51	Carbon film resistor	1/4W 100 ohms
★△Q14	Transistor	2SD1390 (C or D)	*R52	Carbon film resistor	1/4W 33k ohms
Q15	Transistor	2SC1815 (Y)	R53	Carbon film resistor	1/4W 1.5k ohms
			R54	Metal oxide film resistor	1W 4.7 ohms
D1	Diode	1S1588	*R55	Not used	
D2	Diode	1S1588	*R56	Carbon film resistor	1/4W 47k ohms
D3	Diode	1S1588	R57	Carbon film resistor	1/2W 2.2k ohms
D4	Diode	RU-1A	R58	Carbon film resistor	1/2W 2.2k ohms
D5	Zener diode	HZ-30-2	R59	Carbon film resistor	1/2W 10 ohms
D6	Zener diode	HZ-30-2	R60	Carbon film resistor	1/2W 2.7 ohms
D7	Diode	1S1588	R61	Metal oxide film resistor	1W 3.3k ohms
D8	Zener diode	HZ-5C-2	R62	Cement film resistor	7W 330 ohms
D9	Diode	1S1588	R63	Carbon film resistor	1/4W 2.2k ohms
D10	Zener diode	HZ-6C-2	R64	Carbon film resistor	1/4W 5.6k ohms
D11	Zener diode	HZ-6C-2	R65	Carbon film resistor	1/2W 820 ohms
D12	Diode	1S1588	R66	Carbon film resistor	1/4W 5.6k ohms
D13	Diode	1S1588	R67	Carbon film resistor	1/4W 10k ohms
D14	Diode	1S1588	R68	Carbon film resistor	1/2W 1k ohms
D15	Diode	1S1588	R69	Metal oxide film resistor	3W 5.6k ohms
D16	Diode	RH-1C	R70	Carbon film resistor	1/4W 22k ohms
★D17	Zener diode	HZ-7C-2	R71	Carbon film resistor	1/4W 56k ohms
D18	Diode	1S1588	R72	Metal oxide film resistor	1W 470 ohms
D19	Diode	RF-01F	R73	Carbon film resistor	1/4W 1k ohms
D20	Diode	RU-1A	R74	Metal oxide film resistor	3W 6.8k ohms
D21	Diode	RF-01F	R75	Carbon film resistor	1/2W 560 ohms
D22	Diode	RU-1A	R76	Carbon film resistor	1/4W 18k ohms
D23	Diode	RU-1A	R77	Carbon film resistor	1/4W 47k ohms
D24	Diode	RM-1A	R78	Carbon film resistor	1/4W 470 ohms
D25	Diode	RM-1A	R79	Carbon film resistor	1/4W 4.7k ohms
D26	Diode	RM-1A	★△R80	Carbon film resistor	1/4W 2.2k ohms
D27	Diode	RM-1A	R81	Carbon film resistor	1/4W 100k ohms
D28	Diode	RM-1A	R82	Carbon film resistor	1/4W 120k ohms
D29	Diode	1S1588	R83	Carbon film resistor	1/4W 18k ohms
D30	Diode	RU-1A	R84	Carbon film resistor	1/4W 470k ohms
D31	Diode	GH-3F	R85	Carbon film resistor	1/4W 10k ohms
D32	Diode	1S1588	R86	Carbon film resistor	1/4W 10k ohms
D33	Diode	RU-1A	R87	Carbon film resistor	1/4W 7.5k ohms
D34	Diode	RU-1A	R88	Carbon film resistor	1/2W 10 ohms
D35	Zener diode	HZ-7C-2	R89	Metal oxide film resistor	3W 1k ohms
R1	Carbon film resistor	1/4W 75 ohms	R90	Metal oxide film resistor	1W 3.3k ohms
R2	Carbon film resistor	1/4W 68k ohms	R91	Carbon film resistor	1/2W 10k ohms
R3	Carbon film resistor	1/4W 12k ohms	R92	Metal oxide film resistor	1W 1 ohms
R4	Carbon film resistor	1/4W 1k ohms	★R94	Carbon film resistor	1/4W 2.2k ohms
R5	Carbon film resistor	1/4W 91 ohms	R95	Carbon film resistor	1/2W 4.7M ohms
R6	Carbon film resistor	1/4W 330 ohms	R96	Metal oxide film resistor	2W 3.3 ohms
R7	Carbon film resistor	1/4W 150 ohms	R97	Carbon film resistor	1/4W 220 ohms
R8	Carbon film resistor	1/4W 3.3k ohms	△R98	Metal oxide film resistor	1W 2.2k ohms
R9	Carbon film resistor	1/4W 22 ohms	R99	Carbon film resistor	1/2W 1M ohms
R10	Carbon film resistor	1/4W 47 ohms	R100	Carbon film resistor	1/2W 2.2M ohms
R11	Carbon film resistor	1/4W 33k ohms	R101	Carbon film resistor	1/2W 1M ohms
			R102	Carbon film resistor	1/2W 470k ohms
			R103	Carbon film resistor	1/2W 2.2k ohms
			R104	Metal oxide film resistor	1W 22 ohms
			△R105	Carbon film resistor	1/2W 1 ohm
			R106	Carbon film resistor	1/4W 47k ohms
			R107	Carbon film resistor	1/2W 1M ohms
			R108	Carbon film resistor	1/4W 10k ohms
			R109	Carbon film resistor	1/4W 12k ohms
			R110	Carbon film resistor	1/4W 18k ohms

R111	Carbon film resistor	1/4W 47 ohms	VR1	Variable resistor	B-500 ohms
R112	Carbon film resistor	1/4W 220k ohms		carbon film	ohms
R113	Carbon film resistor	1/2W 1k ohms	VR2	Variable resistor	B-1k ohms
R114	Carbon film resistor	1/4W 56k ohms		carbon film	ohms
R115	Carbon film resistor	1/4W 1.2k ohms	VR3	Variable resistor	B-100 ohms
R117	Carbon film resistor	1/4W 68 ohms		metal film	ohms
R118	Carbon film resistor	1/4W 47k ohms	VR4	Variable resistor	B-10k ohms
				carbon film	
C1	Electrolytic capacitor	16V 100µF	VR5	Variable resistor	B-2k ohms
C2	Ceramic capacitor	50V 10pF		metal film	
C3	Electrolytic capacitor	16V 470µF	VR6	Variable resistor	B-100k ohms
C4	Electrolytic capacitor	25V 220µF		metal film	
C5	Electrolytic capacitor	16V 100µF	VR7	Variable resistor	B-1M ohms
C6	Electrolytic capacitor	25V 100µF		cermet film	
C7	Electrolytic capacitor	50V 3.3µF	VR8	Variable resistor	B-100k ohms
C8	Polyester film capacitor	50V 0.01µF		carbon film	
C9	Electrolytic capacitor	16V 10µF	★ VR9	Variable resistor	B-2k ohms
C10	Electrolytic capacitor	25V 100µF		metal film	
C11	Electrolytic capacitor	35V 100µF	★ VR10	Variable resistor	B-1k ohms
C12	Ceramic capacitor	50V 1200pF		metal film	
C13	Ceramic capacitor	50V 560pF			
C14	Ceramic capacitor	50V 1200pF	VS1	Varistor	MV-13
C15	Electrolytic capacitor	160V 47µF	VS2	Varistor	ERZ-C07DK241
C16	Electrolytic capacitor	160V 22µF			
C17	Metallized film capacitor	100V 0.47µF	△ T1	Transformer horizontal	TLH6431
C18	Ceramic capacitor	50V 56pF		drive	
C19	Electrolytic capacitor	16V 100µF	★ △ T2	Transformer F.B.T.	ST4-B49009-5
C20	Tantalum capacitor	25V 1.5µF			
C21	Electrolytic capacitor	16V 470µF	SW1	Slide switch	SLP-2-1022F
C22	Polyester film capacitor	50V 0.01µF	SW2	Slide switch	SLP-2-1022F
C23	Polyester film capacitor	50V 0.01µF	SW3	Slide switch	SLP-2-1022F
C24	Polyester film capacitor	50V 0.01µF			
C25	Polyester film capacitor	50V 0.022µF	CN1	Connector coaxial	BNC-BR-D
C26	Polyester film capacitor	50V 0.0047µF		receptacle	
C27	Ceramic capacitor	50V 470pF	CN2	Connector coaxial	BNC-BR-D
C28	Electrolytic capacitor	160V 100µF		receptacle	
C29	Electrolytic capacitor	160V 100µF	CN3	Connector coaxial	BNC-BR-D
C30	Electrolytic capacitor	160V 1µF		receptacle	
C31	Electrolytic capacitor	50V 10µF	CN4	Connector coaxial	BNC-BR-D
C32	Electrolytic capacitor	160V 3.3µF		receptacle	
C33	Electrolytic capacitor	160V 3.3µF	CN5	Connector 1P plug	W-P3001-02
C34	Electrolytic capacitor	50V 10µF	CN6	Connector 4P plug	W-P3504-02
C35	Polyester film capacitor	200V 0.033µF	CN7	Connector 5P plug	W-P3505-02
C36	Polyester film capacitor	50V 0.0068µF	CN8	Connector 2P plug	W-P3502-02
C37	Ceramic capacitor	2kV 100pF	CN9	Connector 2P plug	171825-2
C38	Metallized film capacitor	400V 0.15µF	CN10	Connector 4P plug	W-P3504-02
C39	Metallized film capacitor	400V 0.15µF	CN11	Connector 1P plug	43031-2
C40	Polyester film capacitor	50V 0.1µF	CN12	Connector 3P plug	171825-3
C41	Ceramic capacitor	20V 22pF	F1	Fuse holder	85BN0806
C42	Electrolytic capacitor	50V 3.3µF	△	Fuse	MGC 1A/250V
C43	Ceramic capacitor	50V 120pF	SG1	Spark gap	GD-626-1.2KV
C44	Polyester film capacitor	50V 0.033µF	★ TH1	Thermistor	TD5-A130D
C45	Electrolytic capacitor	50V 1µF			
C46	Electrolytic capacitor	16V 220µF			
C47	Electrolytic capacitor	10V 100µF			
C48	Polyester film capacitor	50V 0.0022µF			
C49	Polypropylene film capacitor	50V 0.0027µF			
C50	Polyester film capacitor	50V 0.01µF			
C51	Tantalum capacitor	35V 1µF			
C52	Electrolytic capacitor	50V 1µF			
C53	Polyester film capacitor	50V 0.047µF			
C54	Polyester film capacitor	50V 0.1µF			
C55	Polyester film capacitor	50V 0.1µF			
C56	Electrolytic capacitor	16V 100µF			
C57	Ceramic capacitor	1kV 680pF			
C58	Electrolytic capacitor	160V 33µF			
C59	Metallized polyester film capacitor	1.2kV 0.1µF			
C60	Metallized polyester film capacitor	1.2kV 0.1µF			
★ △ C61	Metallized polypropylene film capacitor	1.2kV 0.0012µF			
C62	Polypropylene film capacitor	630V 0.01µF			
★ △ C63	Metallized polypropylene film capacitor	1.2kV 0.0012µF			
★ △ C64	Metallized polypropylene film capacitor	1.2kV 0.0012µF			
C65	Electrolytic capacitor	160V 22µF			
C66	Polyester film capacitor	600V 0.1µF			
C67	Polyester film capacitor	200V 0.1µF			
C68	Electrolytic capacitor	25V 100µF			
C69	Ceramic capacitor	125VAC 0.0047µF			
C70	Electrolytic capacitor	200V 470µF			
C71	Electrolytic capacitor	160V 33µF			
C72	Electrolytic capacitor	160V 100µF			
C73	Polyester film capacitor	50V 0.33µF			
★ C74	Ceramic capacitor	2kV 82pF			
★ △ C75	Metallized polypropylene film capacitor	1.2kV 0.0022µF			
★ C76	Ceramic capacitor	2kV 100pF			
C78	Electrolytic capacitor	160V 100µF			
C79	Electrolytic capacitor	25V 100µF			
L1	Peaking coil	LAL04T100K			
★ L2	Width coil	ST4-B49007-3			
★ L3	Linearity coil	ST4-B49067-2			
L4	Peaking coil	ST-602958-1			


Note: ★ marked value is subject to change by adjustment.
★ marked parts are critical components of X-ray radiation.
Components identified by the △ symbol have special characteristics for safety.
These critical safety components are designed to "fail safe" under abnormal conditions. The failure of any one component often causes stress in other components which could lead to smoke of fire or other hazards. Because of this, components are selected and tested under actual fault conditions to ensure safe operation. Replacement with anything other than the identical Ikegami part may present a hazard.

MECHANICAL COMPONENTS
(Refer to the exploded view)





①	Escutcheon	2B4902000	④⑨	Machine Screw	N+3x12	BNiM	
②	VR. Knob	4B0021700	⑤⑩	Machine Screws	B+3x6	BNiM	
③	Front Ornamental Panel	3B8105100	⑤①	Machine Screws	N+3x12	BNiM	
④	Leg	4Z0132500	⑤②	Machine Screws	B+3x6	BNiM	
⑤	Chassis	2B4907400	⑤③	Plain Washers	3W	ZMC	
⑥	Frame	3B4907900	⑤④	Spring Lock Washers	3SW	ZMC	
⑦	High Voltage Warning Label	4B0511400	⑤⑤	Nuts	3N	ZMC	
⑧	Heat Sink	3B8100100	⑤⑥	Rag	3D	BNiM	
⑨	Heat Sink (2)	4B0029700	⑤⑦	Spring Lock Washers	3SW	BNiM	
⑩	Indicate Label	4B4908000	⑤⑧	Nuts	3N	BNiM	
⑪	PWB Support Metal	3B4907700	⑤⑨	Plain Washers	3W	BNiM	
⑫	BNC Connector Plate	4B4902800	⑥⑩	Spring Lock Washers	3SW	BNiM	
⑬	CRT Warning Label	4B0021500	⑥①	Nut	3N	BNiM	
⑭	FUSE Exchange Label	4B4907000	⑥②	Plain Washer	3W	BNiM	
⑮	Side Plate (Right)	3B8100200	⑥③	Plain Washers	3W	ZMC	
⑯	Side Plate (Left)	3B8100300	⑥④	Spring Lock Washers	3SW	ZMC	
⑰	Regulator Heat Sink	3B4907800	⑥⑤	Machine Screws	N+3x12	BNiM	
⑱	Spring	4B5501000	⑥⑥	Not used			
⑲	Grounding Terminal	4B0020200	⑥⑦	Toothed Lock Washer	3KW		
⑳	Handle	4F0800500	⑥⑧	Machine Screw	N+3x12	BNiM	
㉑	Rear Panel	3B4907300	⑥⑨	Plain Washer	3W	ZMC	
㉒	DHHS Name Plate	4B8103600	⑦⑩	Spring Lock Washer	3SW	ZMC	
㉓	Serviceman Warning Label	4B4907100	⑦①	Nut	3N	ZMC	
㉔	Caution Label	4A4101800	⑦②	Toothed Lock Washers	3KW		
㉕	Upper Case	2B4907200	⑦③	Machine Screws	N+3x12	BNiM	
㉖	Toothed Lock Washers	4kW	⑦④	Machine Screws	B+3x6	BNiM	
㉗	Plain Washers	3W	ZMC	⑦⑤	Machine Screws	N+3x12	BNiM
㉘	Machine Screws	B+3x6	BNiM	⑦⑥	Plain Washers	3W	BNiM
㉙	Machine Screws	T+3x6	ZMBK	⑦⑦	Machine Screw	B+3x6	BNiM
㉚	Machine Screws	SN+4x10	ZMC	⑦⑧	Machine Screws	BTP+3x6	BNiM
㉛	Machine Screws	S+3x8	BNiM	⑦⑨	Nuts	3N	ZMC
㉜	Spring Lock Washers	3SW	ZMC	⑧⑩	Spring Lock Washers	3SW	ZMC
㉝	Machine Screws	B+3x6	BNiM	⑧①	Plain Washers	3W	ZMC
㉞	Machine Screws	SN+4x10	ZMC	⑧②	Toothed Lock Washers	6KW	
㉟	Machine Screws	BrTP+3x8	ZMC	⑧③	Not used		
㊱	Machine Screws	B+3x6	BNiM	⑧④	Spring Lock Washers	5SW	ZMC
㊲	Machine Screws	B+3x6	BNiM	⑧⑤	Nuts	5N	ZMC
㊳	Machine Screws	B+3x6	BNiM	⑧⑥	CRT Washers	4B8104800	
㊴	Machine Screws	N+3x12	BNiM				
㊵	Nuts	3N	BNiM				
㊶	Spring Lock Washers	3SW	BNiM				
㊷	Plain Washers	3W	BNiM				
㊸	Rag	3D	BNiM				
㊹	Machine Screws	N+3x12	BNiM				
㊺	Nuts	3N	BNiM				
㊻	Spring Lock Washers	3SW	BNiM				
㊼	Plain Washers	3W	BNiM				
㊽	Plain Washers	3W	BNiM				

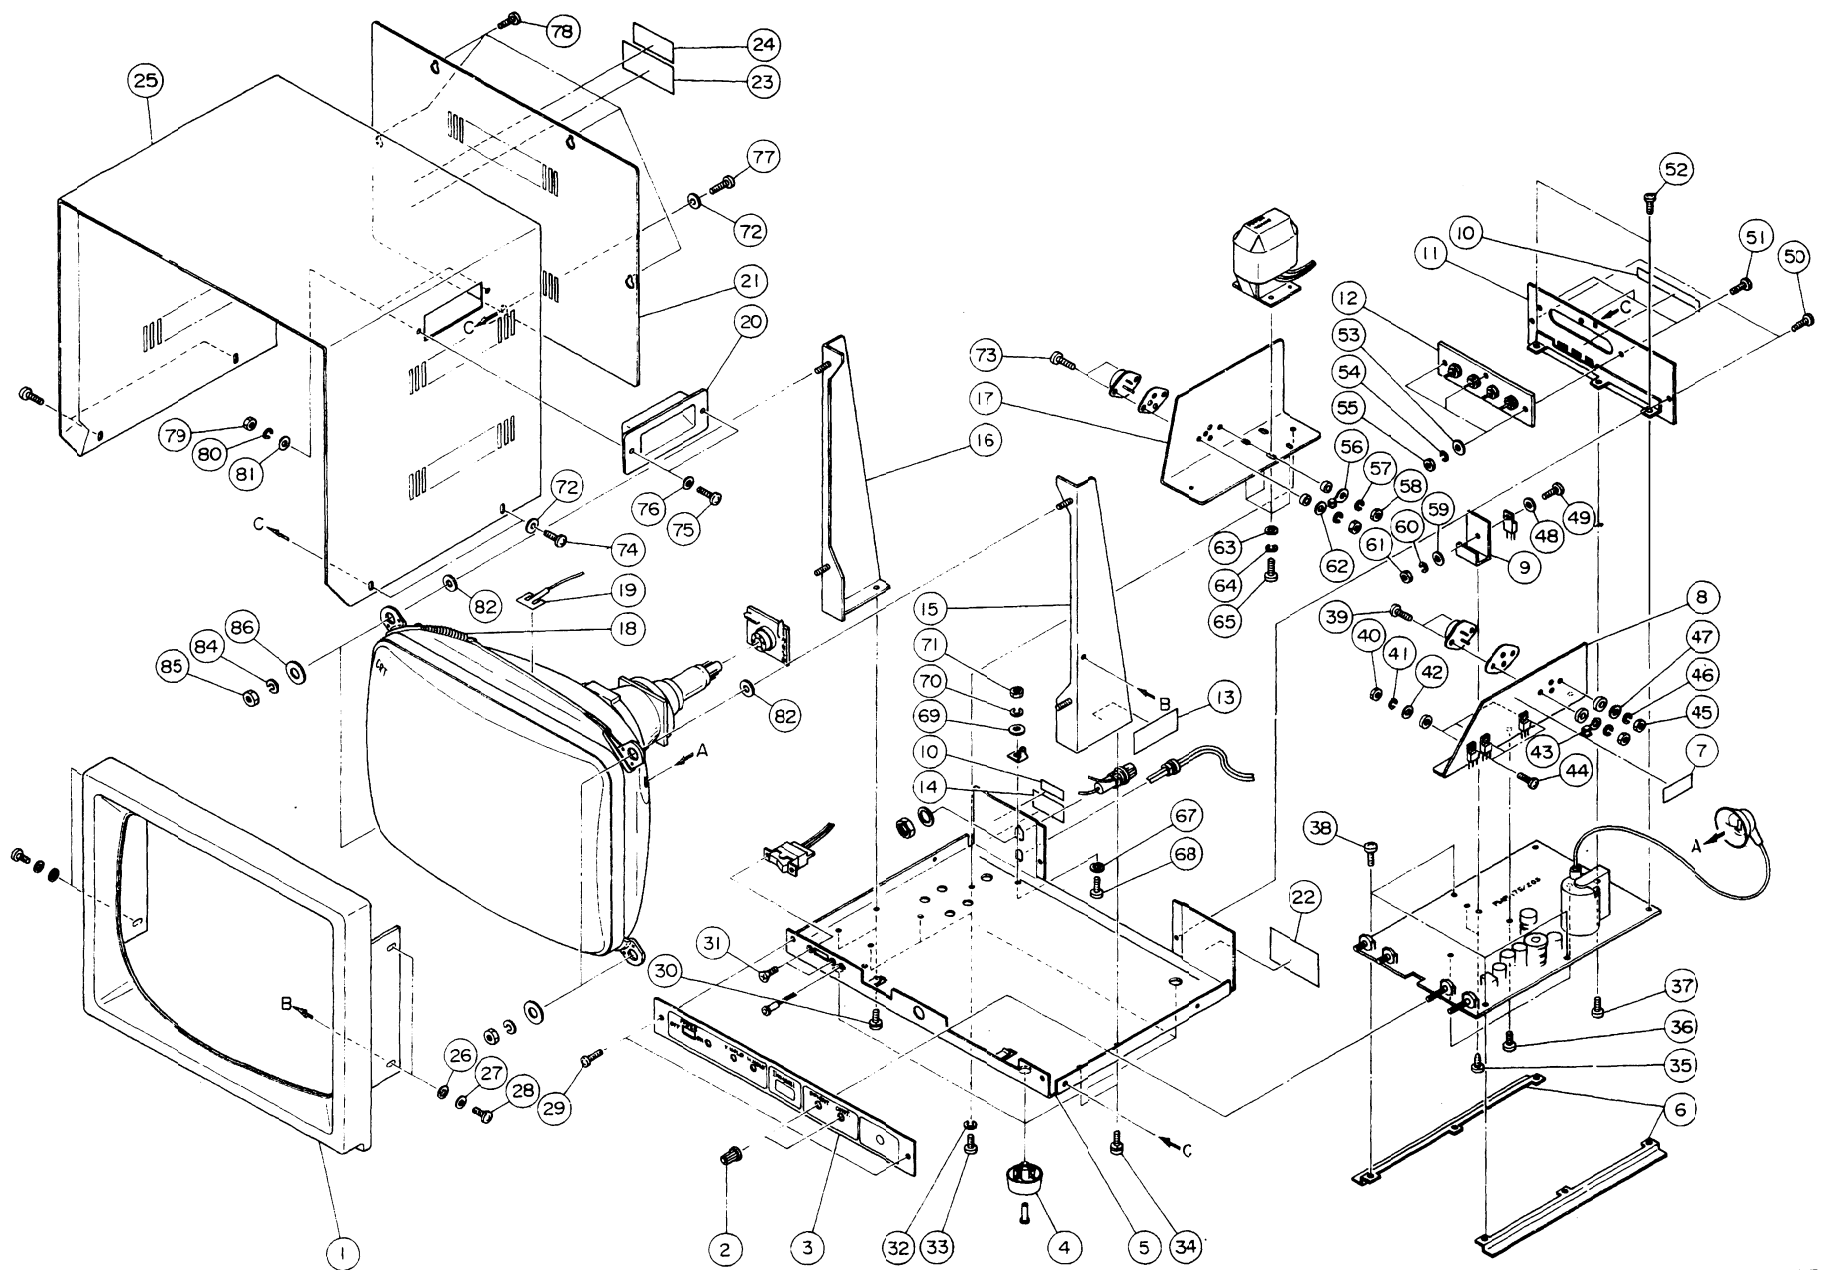

**MODEL PM-175A PICTURE MONITOR
EXPLODED VIEW
DWG. NO. G3-B81079**

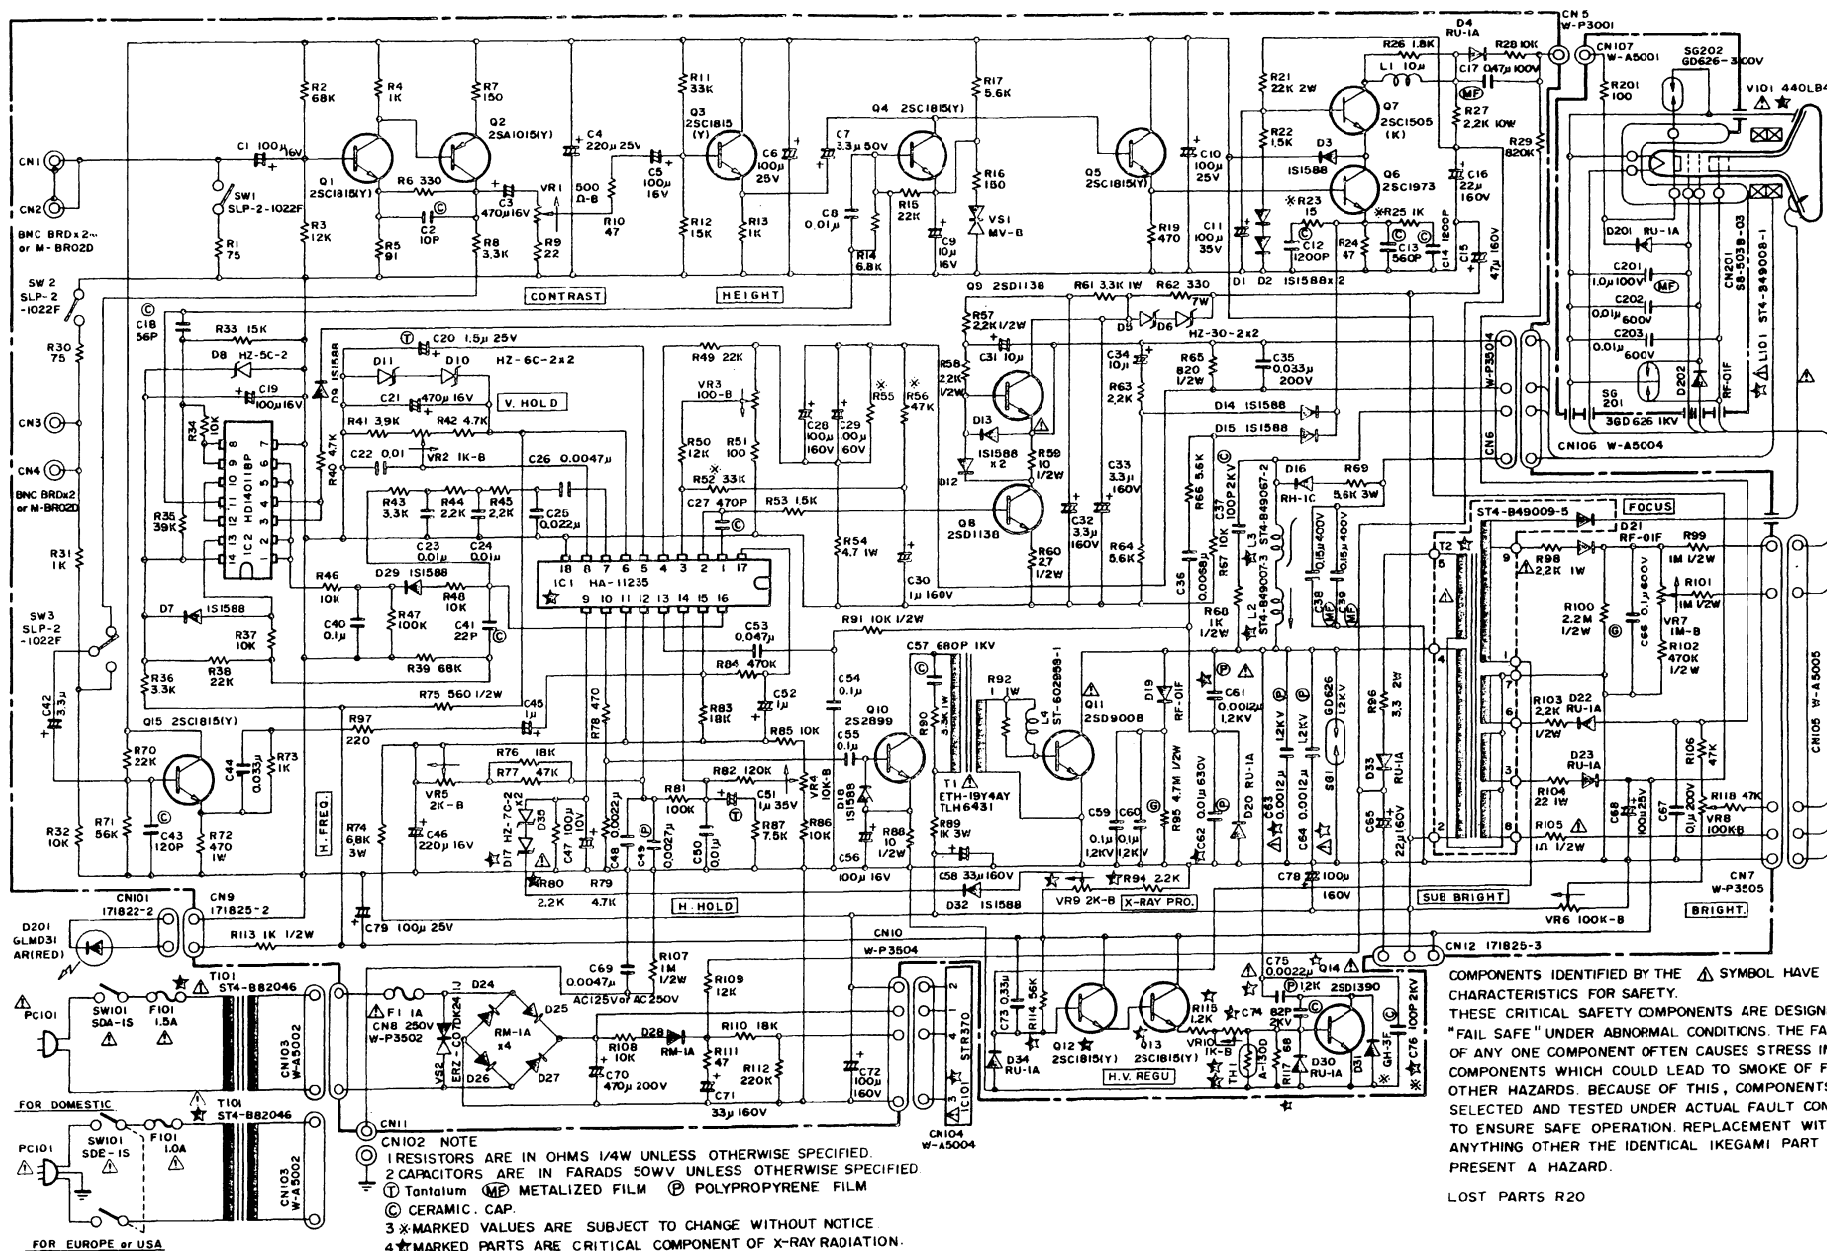

**MODEL PM-175A PICTURE MONITOR
 OVERALL SCHEMATIC DIAGRAM**

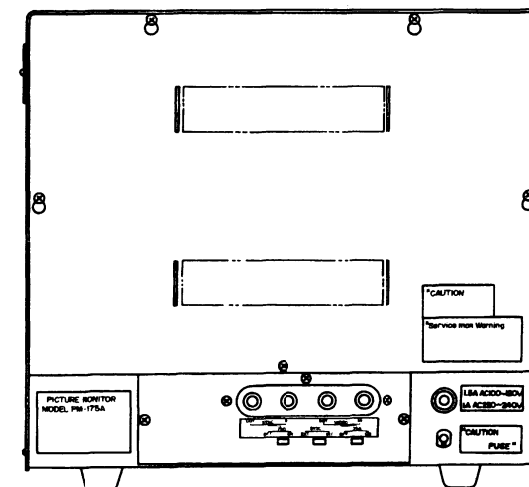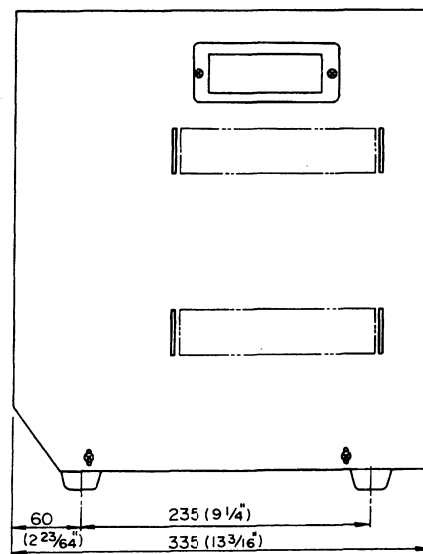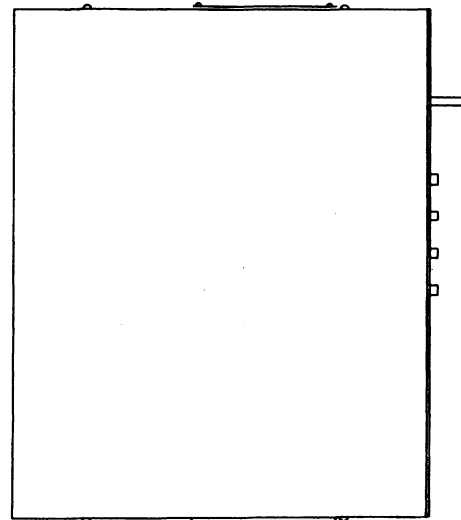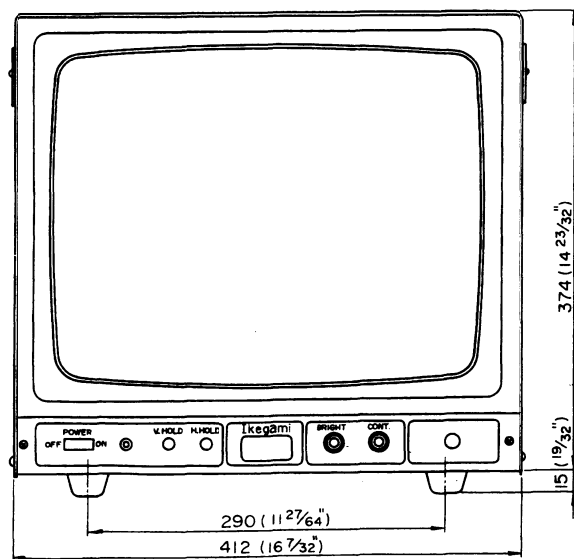

**MODEL PM-175A PICTURE MONITOR
EXTERNAL APPEARANCE**

Ikegami Tsushinki Co., Ltd.

6-16, Ikegami 5 chome, Ohta-ku, Tokyo, 146 Japan
Phone : (03)754-2121, Telex : 2466738 IKETSU J

■ Ikegami Electronics (U.S.A.), Inc.

37 Brook Avenue, Maywood, New Jersey 07607, U.S.A.
Phone : (201)368-9171, Telex : ITCNY 422065

■ Ikegami Electronics (Europe) GmbH

Ikegami Strasse 1, 4040 Neuss 1, F.R. Germany
Phone: (02101) 123-0, Telex: 8517960 ITCD; Fax: (02101) 102820