

Ikegami

IPD-BX11

Hyper Wide Light Dynamic IP Network Camera



FEATURES



Ikegami has been a world leader in analog camera technology for over half a century. The IPD line of network cameras represents the same quality and craftsmanship you have come to expect from the Ikegami in an Internet Protocol (IP) platform.

The IPD-BX11 combines the benefits of an IP network camera with our Hyper Wide Dynamic technology. The resulting sub-megapixel camera captures more useful information from a given scene than megapixel cameras with much greater bandwidth requirements.

IP network cameras produce images previously unimaginable with analog cameras, and allow for modern low-voltage integration at an unprecedented level. If there is one "Achilles heel" to traditional IP technology, it would be the challenge of uneven illumination (i.e. window areas, lobby entrances of buildings, or any location where intense bright and dark areas coincide). With the IPD-BX11 images are clear and natural, regardless of lighting conditions. The sub-megapixel camera delivers a perfect balance of resolution and bandwidth usage for video surveillance.



Conventional Model

IPD-BX11

More Usable Pixels

In a typical light-challenged security environment, a standard megapixel camera can lose a large number of pixels to illumination issues. The camera may collect 1,400,000 pixels from a given scene, but only 500,000 will be useful. The IPD-BX11 produces more usable pixels per image in difficult lighting conditions and does not waste bandwidth transmitting unusable pixels.

High-quality Picture

The camera is designed for smear-free imaging and low noise. The Digital Signal Processor enhances details producing crisp images with a high signal-to-noise ratio.

Scene File Function and Field Setup

The advanced internal menu of the IPD-BX11 allows for precision image adjustment. 4 preset scene files cover the most common lighting challenges and act as a baseline for quick setup. The IPD-BX11 features an analog BNC service port- delivering a true 520TVL image to a local monitor analog for simplified setup and service. No network connection is needed!

IP Network Camera



The IPD-BX11 is a full feature network camera with H.264/M-JPEG video compression support and standard power over Ethernet (PoE) capability. The IPD-BX11 is ONVIF compliant and fully integrated with a large number of network platforms.

IPD-BX11

SPECIFICATIONS

Image Sensor	1/3" DPS CMOS sensor	
Effective Pixels	Approx.410,000 pixels, Effective 758(H) x 540(V)	
Scanning System	NTSC : 525 lines at 59.94Hz, 2:1 interlace PAL : 625 lines at 50Hz, 2:1 interlace	
Synchronization System	Internal Crystal Lock	
Analog Video Output	VBS 1.0Vp-p/75Ω (for adjusting angle of view) Horizontal Resolution 520 TV Line or better	
S/N Ratio	50dB or better (p-p/rms)	
Minimum Illumination (AGC ON)	In color mode : 0.22lx/F1.2 [50IRE] (Electronic Sensitivity Up OFF) In color mode : 0.007lx/F1.2[50IRE] (Electronic Sensitivity Up ON 32x) In monochrome mode : 0.022lx/F1.2[25IRE] (Electronic Sensitivity Up OFF) In monochrome mode : 0.0007lx/F1.2 [25IRE](Electronic Sensitivity Up ON 32x)	
Wide Dynamic Range	Built-in, and Variable	
AGC (Automatic Gain Control)	ON(AGC/HYPER-AGC) / OFF(LOW/MID/HIGH) selectable	
Electronic Sensitivity Up	Built-in, ON/OFF selectable(Up to 32 times)	
Day/Night Function	Built-in, True Day/Night, Auto/Manual selectable	
Digital Zoom	Built-in (Up to 4 times)	
Auto Iris Function	DC Iris	
Detail Correction	Built-in	
White Balance	ATW/ATWex/AWC/MANU selectable	
Color Rolling Reduction Function	Built-in, ON/OFF selectable (CRR Function)	
Privacy Masking	Built-in (Maximum 8 zones)	
Digital Noise Reduction	Built-in, ON/OFF selectable (DNR Function)	
Monitor Output Selection	CRT/LCD selectable	
Camera ID	Up to 24characters (alphanumeric and symbols)	
Lens Mount	CS Mount	
Flange Back Adjustment Mechanism	Built-in	
Image Compression	Codec	H.264 / M-JPEG selectable
	Image Size	NTSC : 720x480, 720x240, 352x480, 352x240 PAL : 720x576, 720x288, 352x576, 352x288
	Frame Rate	NTSC : Up to 30fps PAL : Up to 25fps
	Bit Rates(H.264)	64Kbps ~ 8Mbps
	Image quality(M-JPEG)	5 steps
	Transmission Mode	VBR/CBR
Network	Ethernet 10Base-T/100Base-TX	
Protocol	TCP, UDP, RTP/RTCP, RTSP, HTTP, FTP, NTP, ONVIF support (Multicast Delivery available)	
Monitoring	Viewer or NVR	
Focus EZ	Built-in	
Power Requirement	DC12(10.5 ~ 15V) PoE (IEEE 802.3af) CLASS 0	
Power Consumption	4W approx.	
Operating Ambient Temperature	-10°C ~ +50°C(14.0°F ~ 122°F)	
Operating Ambient Humidity	30% ~ 90% RH (non-condensing)	
External Dimensions	W60 x H58 x D70mm[W2.36 x H2.28 x D2.76 inches] (without projection)	
Weight	300g(0.66lbs)	
Input/ Output Connectors	LAN -- RJ-45(Auto-MDI/MDIX) DC12V Input -- 2P Service MONITOR OUT -- BNC LENS-- 4P(E4-191J-150 or equivalent)	
Standard Accessories	Instruction Manual	

DIMENSIONS (Unit: mm[inch])

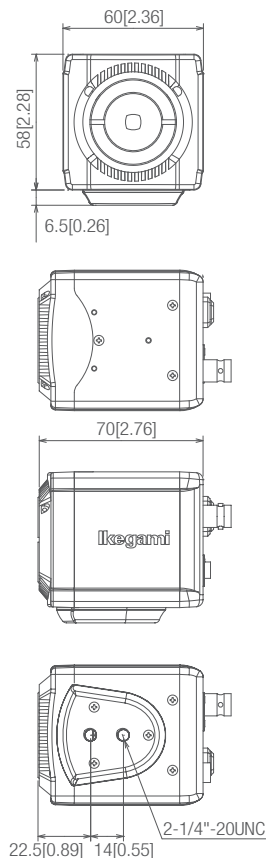

Design and specifications are subject to change without notice.



U262A133-IB

Ikegami IKEGAMI ELECTRONICS (U.S.A.), INC.

■ URL <http://www.ikegami.com>

HEADQUARTERS 37 BROOK AVENUE, MAYWOOD, NJ 07607
Phone:(201) 368-9171 Fax:(201) 569-1626

WESTCOAST OFFICE Phone:(310) 297-1900

SOUTHWEST OFFICE Phone:(972) 869-2363

MIDWEST OFFICE Phone:(708) 460-1451

SOUTHEAST OFFICE Phone:(954) 735-2203