

# Ikegami

## *Unicam HD*

Multi-format CMOS Camera System  
HDK-99

Multi-format CMOS Camera System  
HDK-73



## 2.6 Mega pixel 2/3-inch CMOS Sensors


The HDK-73 and HDK-99 utilize three 2/3-inch 2.6 mega pixel CMOS sensors, each capable of capturing full HD 1920 x 1080 resolution images with a dynamic range of 600% in normal mode and an extremely wide 1200% in HLG mode, and giving you an excellent sensitivity of F12 (60Hz) / F13 (50Hz) and high signal-to-noise ratio.

## HDR (High Dynamic Range)

The camera provides an HDR function with its HLG (Hybrid Log Gamma) curve. It is now possible to shoot a scene with high dynamic range without losing gradation in the highlights




Standard Camera

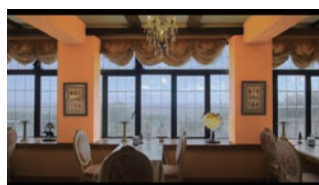

HDR Hybrid Log Gamma with HDR monitor

## Lens Chromatic Aberration Correction

Acquires correction data from the corresponding lens and automatically corrects lens chromatic aberration based on lens zoom, focus, and iris position information.

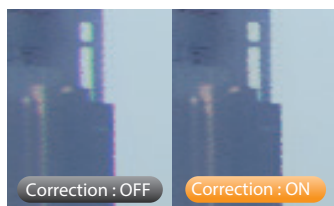

## Focus Assist Function

The Focus Assist function is a newly incorporated useful tool, providing very distinct enhancement to the viewfinder signal to enable the camera operator to make critical focus adjustment. The size of the area, area color, edge color, and display time are adjustable in the camera menu.



Focus Assist ON

## Variable ECC (Electric Color Compensation)

Variable white balance over the broad range of 2,000K to 20,000K.

## SE-H750 System Expander \*HDK-99

The SE-H750 system expander supports operation with large lenses and studio viewfinder for sports and other applications.



## 16-Axis Color Correction \*HDK-99

The color correction function enables precise color adjustment for all occasions. 16 axes of the color gamut can be fine tuned in both hue and saturation. This function works in real time and is extremely beneficial for live multi-camera applications.



Original




Correction : ON

## Digital Extender \*HDK-99


The built-in digital extender expands the center of picture. The expansion can be selected as 1.5X, 2X, 3X, 4X (4 steps) by the camera menu and from the OCP-300.

## Anti-Moiré Filter (Factory Option)

An Anti-Moiré Optical Low-Pass Filter can be fitted in the filter wheel to reduce unwanted moiré patterns when shooting LED screens, etc.

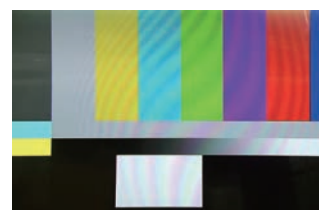

Filter OFF

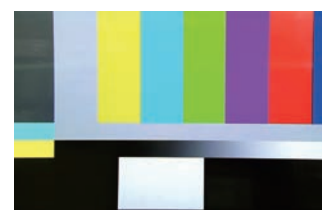

Filter ON

\*Images shown are for illustration purposes

# HDK-99, BSX-100

HDK-99 camera head, FA-97A fiber adaptor, BSX-100 base station

Top of the line HD camera system.

SMPTE type connectors standard. Optionally, the BSX-100 is 4K upscaleable and supports MoIP (ST 2110).

HDK-99


2.6M Sensors	HDR	Focus Assist	Anti-Moiré Filter *option
3G 1080p	F11	S/N 62dB	10.8 lbs
16-Axis CC			

BSX-100

Size 3RUHalf	Cable length: 4,000m (13,123ft)	
4K Upscale License *option	12G-SDI *option	MoIP *option



BSX-100

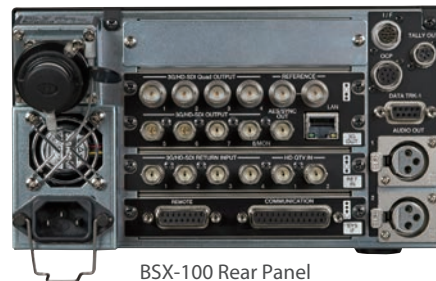

BSX-100 Rear Panel



HDK-99

# HDK-73, BSF-300/L

HDK-73 camera head, FA-300/L fiber adaptor, BSF-300/L base station

Affordable 1.5G camera system.

The camera connector is selectable between SMPTE type (FA-300L and BSF-300L) and opticalCON DUO type (FA-300 and BSF-300).

HDK-73

2.6M Sensors	HDR	Focus Assist	Anti-Moiré Filter *option
1.5G 1080i / 720p	F12	S/N 60dB	10.1 lbs

BSF-300

Size 1,5RU Full	Cable length: 300m (984.25ft)
-----------------	-------------------------------



BSF-300/L



BSF-300L Rear Panel



HDK-73

# Accessories

Operation Control Panel



OCP-300



OCP-100

Master Control Panel



MCP-300

Viewfinders



2-inch color viewfinder  
VFL201A



7-inch color viewfinder  
VFL-P700A

		HDK-99 with FA-97A					HDK-73 with FA-300/L					
Image Sensors		2/3-inch 2.6 million pixel 3CMOS										
Optical System		RGB F1.4 Prism										
Sensitivity		F11 (1080/59.94i) / F12 (1080/50i) at 2,000 lx					F12(1080/59.94i) / F13(1080/50i) at 2,000 lx					
S/N		62dB HDTV					60dB HDTV					
Modulation Depth		60% or more										
Limiting Resolution		1000 TV Line or more										
Dimensions (with FA exclude VF)		W138.5 x H270 x D337 mm (W5.5 x H10.62 x D13.25 inches)										
Weight (with FA exclude VF)		Approx. 4.9 kg (10.8 lbs)					Approx. 4.6 kg (10.1lbs)					
Operating Condition	Ambient Temperature	-20°C to +45°C (-4°F to +113°F)										
	Relative Humidity	30% to 90%: Non-condensing										
Filters		ND	1	2	3	4	5	ND	1	2	3	4
			CAP	100%	25%	6.2%	1.6%		100%	25%	6.2%	1.6%
		CC/EFF	A	B	C	D	E	ECC	A	B	C	D
Variable ECC		CROSS 3,200K 4,300K 6,300K 8,000K										
		2,000K to 20,000K										
Scanning System Format	1080p (59.94/50 Hz)	yes					N/A					
	1080i (119.88/100 Hz)	option					N/A					
	1080i (59.94/50 Hz)	yes										
	720p (59.94/50 Hz)	yes										
	1080p (29.97/25 Hz)	yes					N/A					
	1080p (23.98 Hz)	yes					N/A					

		BSX-100		BSF-300/L	
Output Signals					
Video Output	12G-SDI	4 ch (Option, with 4K Upscale license & 12G OUT module)		N/A	
	3G-SDI	7 ch 3G/HD-SDI		N/A	
	HD-SDI	incl. 1ch HD-SDI Video Trunk (Option)		4 ch HD/SD-SDI (Switchable)	
	SD-SDI	N/A			
	CVBS	N/A		2 ch	
Optional Output Module		MoIP Module, 12G OUT Module (both capable of 4K upscaled output with license)		N/A	
MON Video		1 ch 3G/HD-SDI		1 ch HD/SD-SDI (Selectable), 1 ch CVBS 1V p-p 75-ohm	
Input Signals					
External Sync Signal		1 ch (Loop Through) Tri-Sync SMPTE274M / BB (CVBS) - auto detect			
Return Video Signal		4 ch 3G*/HD-SDI		2 ch HD/SD-SDI (selectable) 2 ch SD-CVBS	
Q-TV Signal		1ch 3G*/HD-SD		1 ch SD-CVBS 1V p-p 75-ohm Single End	
PGM (Program Sound)		3 ch		2 ch	
Other I/O					
Data Trunk	RS-422	2 ch		1ch	
Intercom (ENG/PROD)		4-wire or Clearcom or RTS			
Tally In/Out		R/G/Y		R/G	
General Specifications					
Dimensions		W 216 x H 124.8 x D 406.9 mm		W 483x H 66.4 x D 405 mm	
(excluding protrusions)		(W 8.5 x H 4.91 x D 16.01 inches)		(W 19 x H 2.6 x D 15.9 inches)	
Weight		Approx. 7 kg (15.5 lbs)			
Ambient Temperature		Operating temperature: 0°C to +40°C (+32°F to +104°F) Storage temperature: -30°C to +60°C (-22°F to +140°F)			
Relative Humidity		30% to 90% (Non-condensing)			
Maximum Cable Distance		4,000 m (13,123 ft)		300 m (984.25 ft)	
(using 9.2 mm diameter SMPTE fiber camera cable)		with 2-inch viewfinder		with 2-inch viewfinder	

\* 3G-SDI is converted to HD-SDI (1.5G) in the base station to transmit to the camera head.

Design and specifications are subject to change without notice.

**Ikegami** **IKEGAMI ELECTRONICS (U.S.A.), INC.**

■ URL [www.ikegami.com](http://www.ikegami.com)

**HEADQUARTERS** 300E State Route 17S, Mahwah, NJ 07430 USA  
Phone:(201) 368-9171

U473C243-SELF